

G-PY-8AC250

Galgus 8-Port Gigabit PoE Injector with 8 PoE Ports

10/100/1000M 8-Port PoE Injector with 8 PoE Ports















- ◆Supply power to HD network surveillance cameras with Cat5e (PoE)
- ♦16x 10/100/1000M RJ45 ports; 1x AC input port; 8x Gigabit PoE Ports
- ◆AC input: 100-240V, 50-60Hz
- ◆Compatible with IEEE 802.3af/at standard
- ◆Coming with the Ethernet network port and PoE output port, and the power input port with lighting-proof function (meet the secondary lightning protection)
- ♦ Can supply power with the spare line pair(4/5 (+), 7/8 (-) method or the data line pair 1/2(+), 3/6(-) method
- ◆No fan. natural heat dissipation, small, quiet design.

Description

PoE Injector is also called as Power over Ethernet mid-span devices. 8-Port PoE injector, that is PoE power supply module, is the most flexible and the hottest products among the power supply devices. There are 8x RJ45 PoE ports for these 8-Port PoE injectors. This mid-span have 8x2 Standard RJ45 network ports, one group of network ports will use for upper Ethernet switches or other network devices, another group of network ports will support POE power supply output with network data output.

These 8-Port PoE injectors provide a simple, economical, high-performance and intelligent way for Ethernet PoE power supply and data communication. It's ideal choice for those who need the superior quality project because of its simple use, easy to install, superior performance and cost-effective. They can supply power to HD webcam through Cat5 Ethernet cable, in order that make it more flexible for the places difficult to connect to power supply, and provide with more efficient solutions.




Technical Specification

Product Name	8-Port 10/100/1000M PoE Injector with 8 PoE Ports
Product Name	
Product Model	G-PY-8AC250
Port Description	16x 10/100/1000M copper cable RJ45 ports, 1x AC input port, 8x PoE ports
PoE Power Supply	mid-span: 4/5, 7/8 data line pair(default); end-span: 1/2,3/6 spare line pair (can be customized)
Network Medium	100BASE-TX: 5Cat and more UTP (≤100 meters)
	1000BASE-TX: 5Cat and more UTP (≤100 meters)
Thermal Protection	>100°C
Performance	Working rate:10/100/1000Mbps
	Network port protection: meet with IEC61000-4-2(ESD)
	MTBF: 100,000 hours
PoE Standards	IEEE 802.3af/at
LEDs Indicator	PoE working status
Power	Total power: 250W
	Max PoE power for each port: 30W
	AC input voltage: 100~240V, 50-60Hz
Dimensions/Weight	LxWxH: 280x186x44(mm), 1.565kg
Working Environment	Operating Temperature: -20° \sim 55°C , Storage Temperature: -20° \sim 75°C
	Working Humidity: $10\%{\sim}90\%$, non-condensing
	Storage Humidity: 10% \sim 95%, non-condensing
Warranty	CE mark,commercial,FCC Part 15 Class B, RoHS
	1 year warranty




Dimension

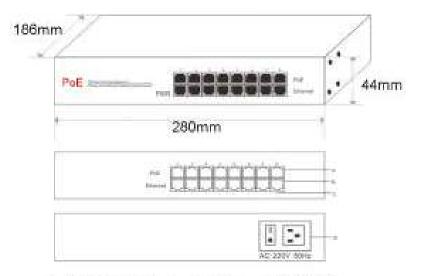

A. RJ45 PoE Output B. Ethernet RJ45 Input C. PoE Status Light D. AC 220V/50Hz Input

Application

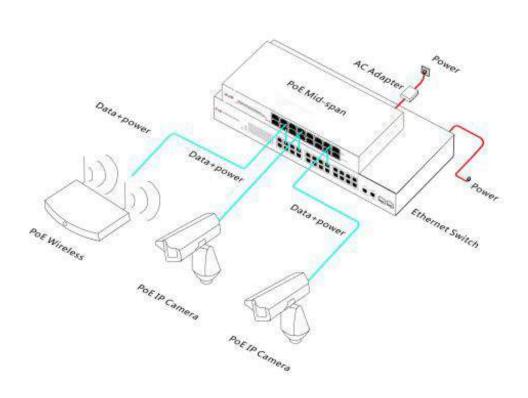



Packing List

	8-Port 10/100/1000M PoE Injector with 8 PoE Ports
Packing	User Guide
List	Power Cable
	Warranty Card